Nano World Journal

https://doi.org/10.17756/nwj.2023-s3-192

Research Article

Open Access

Experimental Study on the Rate of Material Removal from Novel Hybrid Composites Made of Al7075/5%B4C + 2% Mg and Al7075 Alloy using Wire Electrical Discharge

S Subikshan and P Thamizhvalavan*

Department of Mechanical Engineering, Saveetha School of Engineering, Saveetha Institute of Medical and Technical Sciences, Saveetha University, Chennai, Tamil Nadu, India

***Correspondence to:**
P Thamizhvalavan
Department of Mechanical Engineering,
Saveetha School of Engineering,
Saveetha Institute of Medical and
Technical Sciences,
Saveetha University,
Chennai, Tamil Nadu, India.
E-mail: thamizhvalavanp.sse@saveetha.com

Received: July 31, 2023
Accepted: November 01, 2023
Published: November 03, 2023

Citation: Subikshan S, Thamizhvalavan P. 2023. Experimental Study on the Rate of Material Removal from Novel Hybrid Composites Made of Al7075/5%B4C + 2% Mg and Al7075 Alloy using Wire Electrical Discharge. *NanoWorld J* 9(S3): S1087-S1091.

Copyright: © 2023 Subikshan and Thamizhvalavan. This is an Open Access article distributed under the terms of the Creative Commons Attribution 4.0 International License (CCBY) (http://creativecommons.org/licenses/by/4.0/) which permits commercial use, including reproduction, adaptation, and distribution of the article provided the original author and source are credited.

Published by United Scientific Group

Abstract

This study compares the removal rates of the new boron carbide and magnesium reinforcement materials with and without the Al7075 alloy. Al7075 alloy served as the main component of the matrix, and magnesium and novel boron carbide served as reinforcement. At 720 °C and 500 rpm, the Al7075 alloy was stir cast to guarantee uniform reinforcement distribution. There were 20 samples in each group, an 80% pretest power, a 0.05% beta, and a 95% CI. In this study, material removal rate (MRR) is found through the difference between the workpiece's initial and final weights in grams. These results showed a statistically significant difference between the two groups, with a p value of 0.000 ($p < 0.05$). The casting voids caused the MRR of Al7075 to achieve its maximum for the same process parameter within the study's constraints. The casting voids caused the MRR of Al 7075 to achieve its maximum for the same process parameter within the study's constraints. It was concluded from the results that due to casting voids, the MRR of Al7075 is maximal at the same process parameter.

Keywords

Aluminum, Boron carbide, Magnesium, Hybrid composite, Casting, Sustainable production

Introduction

This study's focus is on the rate of material removal. The MRR is a measurement of the volume of material that is removed from the workpiece per unit of time while cutting hybrid composites made of Al7075/5%B4C + 2% Mg and Al7075 alloy [1-3]. The machining accuracy, surface quality, and general process efficiency may all be impacted by the MRR, making it a crucial performance metric in WEDM [4, 5]. During wire electrical discharge machining (WEDM), the MRR of the Al7075 alloy and the Al7075/5%B4C + 2% Mg hybrid composites will be compared to identify any changes in the machining capabilities of the two materials [1, 6, 7]. Al7075 is being used as sustainable manufacturing. The mechanical characteristics of the resultant composites, such as higher hardness, tensile strength, and wear resistance, are improved by the addition of boron carbide particles to the aluminum matrix. Because boron carbide particles are extremely hard, less tool wear happens during machining, boosting MRR [8].

Magnesium is a special material for experimental studies in WEDM, because of its lightweight, high thermal and electrical conductivity, and softness. Due to their superior mechanical qualities over traditional metals and alloys, the usage of composite materials is widespread many other disciplines, including domestic applications, sports, utilities, the maritime, aircraft, and car industries, as well as several other businesses [9, 10]. As the special machining processor under job shop category the scheduling these kind of processes [11, 12]. The

most common uses include those for vehicles, gears and shafts, and aircraft constructions [13, 14]. Al7075's growing use in sustainable production manufacturing methods highlights its value as a sensible alternative for sectors looking to reduce their negative environmental effects and advance long-term sustainability [15].

High electric energy is used in the unconventional machining technique known as high-speed EDM to effectively remove materials [16]. An experimental study on the MRR during WEDM of these materials may be beneficial for optimizing the machining of aerospace components, such as aircraft structural parts or turbine blades, as well as for producing high-strength components, such as suspension parts or engine components, in the automotive industry. WEDM might be a desirable machining technique due to the precision and accuracy needed in the manufacturing of medical equipment may be helpful for machining medical items, like implants or surgical instruments, more effectively [17].

There have been 41 and 132 citations for similar publications published in the last five years, respectively, on Google Scholar and Science Direct. Boron carbide serves as a reinforcing ingredient in the AMMCs, improving their overall performance. Boron carbide is renowned for its remarkable mechanical qualities, including high hardness, high melting point, and strong wear resistance [18, 19].

Technology can be utilized to enhance the WEDM's effectiveness while cutting various materials and optimising the machining procedure [20]. It might also clarify how the B_4C, and Mg additions affect the hybrid composite's machinability and in determining whether there are any potential benefits or drawbacks to employing the hybrid composite rather than the alloy in WEDM applications [21]. It is reported that comparatively fewer research has been published on investigate the MRR of Al7075/5%B_4C + 2% Mg hybrid composites which compared with Al7075 alloy. This study set out to compare the MRR of hybrid composites comprised of Al7075 alloy and 5%B4C and 2% Mg. The aim of the experiment was to determine the rate of component removal from hybrid composite materials.

Materials and Methods

The main materials of interest in this work are hybrid Al7075/5%B4C + 2% Mg composite and Al7075 alloy. These materials are available as plates, rods, and other machining-friendly shapes for purchase.Al7075 is being used as Sustainable production. A WEDM machine would be required to do the testing for the machining operations. This device typically includes a wire electrode, a workpiece holding, and a controller for setting and adjusting the machining parameters. Other components, such as dielectric fluid and wire electrodes, can also be necessary, depending on the WEDM machine being utilised [22]. The basic materials employed in this investigation were magnesium, aluminum 7075, aluminum 7075, and boron carbide. When the material was procured from a vendor in Chennai, it was in the form of rods, which is what is required for our research since it needs to be flat. In this research, aluminum alloys 7075 and 7075 hybrid were examined. Al7075 alloy and hybrid metal matrix composites are created utilising the stir casting process [23-25].

In group 1, the aluminum 7075 composite of 780g was cast and formed into round shape (20 × 300) and the slot was machined in WEDM [26]. In group 2, the aluminum 7075 780g composite which has reinforcement 250 grams of boron carbide, and 50 gram of magnesium balance aluminum 7075 material was cast and formed into round shape (20 × 300mm) and the slot was machined in WEDM [27-30]. During the drilling process in a WEDM, data were collected from the Control Group Al7075 for 20 samples and the Experimental Group Al7075/5%B4C + 2% Mg for 20 samples by varying the input parameters, such as pulse on, pulse off, and wire feed rate [31].

The composites are cut using WEDM. The following is being machined The following input parameters can be used to compute the MRR in cubic centimetres per minute (cc/min) after milling: depth of cut (mm), breadth of cut (mm), and feed rate [32].

Statistical analysis

SPSS was used as the software program for the statistical analysis for this investigation. The MRR in mm^3/min is influenced by three independent variables: the wire feed rate, pulse on, and pulse off. The two composites, Al7075 and Al7075 Hybrid composites, were compared and their significance was assessed using the independent variable sample T-test [33].

Results

In this study, the MRR of Al7075/5%B4C + 2% Mg hybrid composites was examined, and it was compared to Al7075 alloy, which offers better performance than the base metal. Each group considered. Therefore, the main objective of this study is to determine the milled slot's maximum MRR. which has been measured using the proper calculation, and to record all the readings and using the SPSS software, finding increases in material removal and comparing the parent material with the hybrid metal matrix composites' standard deviations yielded a significance value of 0.000 ($p < 0.05$) [34, 35].

Values from 20 samples are displayed in table 1. The mean, standard deviation, and 95% confidence interval for the mean of the Al7075/5%B4C + 2% Mg hybrid composites and the Al7075 alloy are shown in table 2 and table 3. Al7075 alloy has a mean MRR of 16.4192, whereas hybrid composites made of Al7075/5%B4C + 2% Mg have a mean MRR of 14.8541. Standard deviations of MRR for Al7075 alloy and hybrid composites made of Al7075/5%B4C + 2% Mg are 0.38650 and 0.25411, respectively. Al7075 alloy has a minimum standard error mean of 0.08643, and Al7075/5%B4C + 2% Mg hybrid composites have a minimum standard error mean of 0.05682.

Figure 1 to figure 3 graphs the average MRR during WEDM for Al7075/5%B4C + 2% Mg hybrid composites and Al7075 alloy. With a p value of 0.000 (p 0.05), these findings demonstrated a statistically significant difference be-

Table 1: MRR during WEDM of Al7075/5%B4C + 2% Mg hybrid composites and Al7075 alloy.

Exp no	Al7075 alloy	Al7075/5%B4C + 2% Mg hybrid composites
1	16.08	14.72
2	16.01	15.02
3	16.68	14.94
4	15.68	15.27
5	16.73	14.82
6	15.78	14.58
7	16.08	15.29
8	16.36	14.69
9	16.54	14.87
10	16.97	15.25
11	16.92	14.69
12	16.83	14.91
13	16.08	15.36
14	16.59	14.67
15	16.74	14.67
16	16.35	14.67
17	16.09	14.74
18	16.76	14.66
19	16.73	14.53
20	16.37	14.73

Table 2: Group statics of the MRR during WEDM of Al7075/5%B4C + 2% Mg hybrid composites and Al7075 alloy.

Group statistics					
Groups		N	Mean	Std. deviation	Std. error mean
MRR	EG	20	16.4192	0.38650	0.08643
	CG	20	14.8541	0.25411	0.05682

tween the two groups. 20 samples of the Al7075 alloy and Al7075/5%B4C + 2% Mg hybrid composites are collected for each phase. The 95% confidence interval of the difference at lower value is 1.35567 and the upper value is 1.77443 in the MRR of the equal variances are considered. The 95% confidence interval of the difference at the lower value is 1.35458 and the upper value is 1.77552 in the MRR of the equal vacancies are not assumed [36].

Discussion

This study compares two different types of composites and finds that pure Al7075 has the highest MRR. Using Al7075 at 0 RPM under the influence of 0 RPM of speed, 0 mm of the depth of cut, and 0.5 mm/min of feed rate, the maximum MRR was attained.



Figure 1: AA7075 pure alloy after wiring electric discharge machining.

The minimum MRR measured was 0 mm^3/min. When compared to Al7075 and Al7075/5%B4C + 2% Mg Hybrid composites, Al7075 provides the maximum surface roughness [37]. With a significance value of 0, the use of reinforced composites greatly improved the composite's surface roughness when compared to Al7075 hybrid composites [38-40]. Other elements that affect MRR include feed rate and cut depth. MRR increases as feed rate and cuts depth increase. These results indicate a 32% increase in the MRR. Al7075, these are necessary for this composite to have a better surface finish and a smaller depth of cut. No opposing research analysis is discovered in the MRR findings [41].

This study only looked at Al7075/5%B4C + 2% Mg Hybrid composites. This is a novel reinforced composite (Al7075/5%B4C + 2% Mg hybrid composites) with a higher surface finish and a lower cut depth [42]. This study compares two types of composites and discovers that pure Al7075 has the highest MRR.

Table 3: MRR test of Al7075/5%B4C + 2% Mg hybrid composites and Al7075 alloy on independent samples during WEDM with a p value of 0.000 (p 0.05), these findings demonstrated a statistically significant difference between the two groups.

Independent samples test										
-		F	Sig.	t	df	Sig. (2-tailed)	Mean difference	Std. error difference	95% confidence interval of the difference	
-									Lower	Upper
MRR	Equal variances assumed	5.686	0.022	15.131	38	0.000	1.56505	0.10343	1.35567	1.77443
	Equal variances not assumed	-	-	15.131	32.839	0.000	1.56505	0.10343	1.35458	1.77552

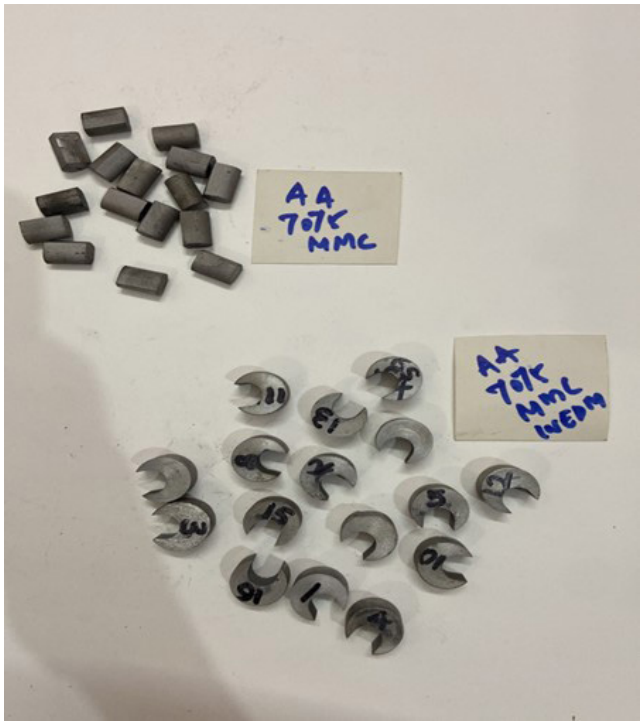

Figure 2: Al7075/5%B_4C + 2% Mg after wire electric discharge machining.

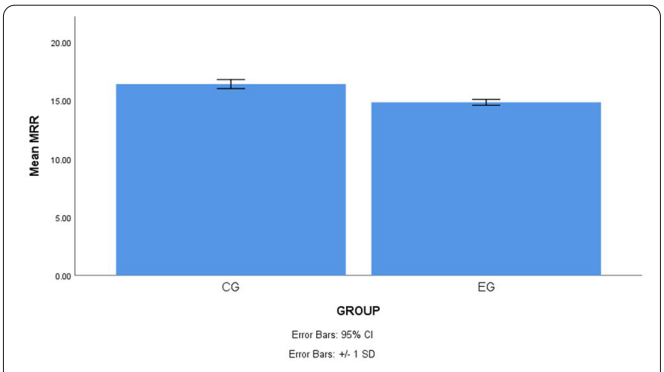

Figure 3: Graph on the mean value of MRR during WEDM of Al7075/5%B_4C + 2% Mg hybrid composites and Al7075 alloy.

Conclusion

Within the confines of the investigation, Wire Electrical Machining milled slot studies were performed using an HSS milling cutting tool on Pure Al7075 and reinforced metal matrix composites. Based on the measured material clearance rate, the effectiveness of these materials was evaluated. These tests' findings show that casting voids cause the MRR of pure Al 7075 to increase the most at the same process parameter. The results of the tests show that the three main factors influencing the rate of material removal are feed rate, speed, and depth of cut.

Acknowledgements

None.

Conflict of Interest

None.

References

1. Singh T, Misra JP, Singh B. 2017. Experimental investigation of influence of process parameters on MRR during WEDM of Al6063 alloy. *Mater Today Proc* 4(2): 2242-2247. https://doi.org/10.1016/j.matpr.2017.02.071
2. Gnanavel C, Saravanan R, Chandrasekaran M, Pugazhenthi R. 2017. Restructured review on electrical discharge machining-a state of the art. *IOP Conf Ser Mater Sci Eng* 183(1): 012015. https://doi.org/0.1088/1757-899X/183/1/012015
3. Thamizhvalavan P, Arivazhagan S, Yuvaraj N, Ramesh B. 2019. Machinability study of abrasive aqua jet parameters on hybrid metal matrix composite. *Mater Manuf Process* 34(3): 321-344. https://doi.org/10.1080/10426914.2018.1544707
4. Xiao G. 2023. Machining technology and environmental degradation mechanism of surface microstructure of special materials-volume II. *Front Mater* 10: 1284486. https://doi.org/10.3389/fmats.2023.1284486
5. Saravanan R, Sathish T, Vijayan V, Rajkumar S, Sharma S, et al. 2023. Eco-friendly MoS_2/waste coconut oil nanofluid for machining of magnesium implants. *Rev Adv Mater Sci* 62(1): 20220296. https://doi.org/10.1515/rams-2022-0296
6. Anbuchezhiyan G, Saravanan R, Pugazhenthi R, Rathinam V, Nagireddy M. 2022. Reconnoitering the influence of nanofluid of Nano-alumina particles enriched waste coconut oil in Machining SAE 1045 shaft on modification Surface finish. *Mater Today Proc* 64: 661-666. https://doi.org/10.1016/j.matpr.2022.05.183
7. Saravanan R, Anbuchezhiyan G, Pugazhenthi R, Sura S. 2022. Experimental investigation on tool wear reduction by nano-alumina particles enriched waste coconut oil nano-fluid for machining SAE 1045 shaft. *Mater Today Proc* 64: 781-786. https://doi.org/10.1016/j.matpr.2022.05.296
8. Suresh Pungaiah S, Sahu KK, Yuvaraja R, Jayahari Prabhu G, Raja Sudharsan R, Thamizhvalavan P, et al. 2022. Investigation on mechanical behaviour of lm6 aluminum alloy hybrid composites processed using stir casting process. *Adv Mater Sci Eng* 2022: 1-7. https://doi.org/10.1155/2022/7539546
9. Amuthan T, Saravanan R, Gnanavel C, Manikandan R, Jagadeeswaran P, et al. 2023. Cutting zone temperature reduction in by using novel nanofluid in SAE1144 machining. *Mater Today Proc* 2023. https://doi.org/10.1016/j.matpr.2023.03.614
10. Kanthababu M. Arivazhagan S. 2015. Experimental investigations on material removal rate in abrasive water jet machining of Al/B4C/Zr-SiO_4 hybrid metal matrix composites. *J Appl Sci Res* 14(11): 144-150.
11. Vivek P, Saravanan R, Chandrasekaran M, Pugazhenthi R. 2016. Minimizing idle time of critical machine in permutation flow environment with weighted scheduling. *ARPN J Eng Appl Sci* 11(5): 3483.
12. Pugazhenthi R, Saravanan R, Chandrasekaran M, Issac RF, Vivek P. 2011. Optimization of wheel axle plant manufacturing environment by simulation. *ARPN J Eng Appl Sci* 12: 2412-2418.
13. Thamizhvalavan P, Yuvaraj N, Arivazhagan S. 2022. Abrasive water jet machining of Al6063/B_4C/$ZrSiO_4$ hybrid composites: a study of machinability and surface characterization analysis. *Silicon* 14(3): 1093. https://doi.org/10.1007/s12633-020-00888-2
14. Saravanan R, Malladi A, Gopalakrishnan T, Manikandan R, Jagadeeswaran P, et al. 2023. Investigating concentration of nano-particles influence in Molybdenum disulfide waste cooking oil nanofluid for machining of SAE 1144 in surface finish enhancement. *Mater Today Proc* 2023. https://doi.org/10.1016/j.matpr.2023.03.441
15. Cooke K. 2020. Aluminium alloys and composites. BoD–Books on Demand.
16. Sudhir PJ, Holalu Venkatadas R, Gonchikar U. 2020. Machining Characteristics Estimation in WEDM Process while Machining Titanium Grade-2 Material using ANN. In ASME International Mechanical

Engineering Congress and Exposition. American Society of Mechanical Engineers, pp V02AT02A006.

17. Xiong L, Xiong LU. 2018. Modeling and control of WEDM process of silicon single crystal. *J Mech Eng* 54(17): 149-156.
18. Mishra SK, Singh S, Singh S, Singh S, Mandal A, et al. 2016. Optimization of process parameters in WEDM process. *Int J Adv Res Innov* 4: 69-73.
19. Gnanavel C, Saravanan R, Baskaran P, Vignesh M, Aneesh VN, et al. 2023. Tool wear effects on green and WCO/MoS_2 nanofluid clean machining. *Mater Today Proc* 2023. https://doi.org/10.1016/j.matpr.2023.03.279
20. Bohlmann B, Buresch J, Haas RD. 2011. Development of a Multi-Axis WEDM Process. In International Manufacturing Science and Engineering Conference, pp 333-335.
21. Raju JS, Depoures MV, Shariff JA, Chakravarthy SU. 2022. Characterization of natural cellulosic fibers from stem of symphirema involucratum plant. *J Nat Fibers* 19(13): 5355-5370. https://doi.org/10.1080/15440478.2021.1875376
22. Sathish T, Sunagar P, Singh V, Boopathi S, Al-Enizi AM, et al. 2023. Characteristics estimation of natural fibre reinforced plastic composites using deep multi-layer perceptron (MLP) technique. *Chemosphere* 337: 139346. https://doi.org/10.1016/j.chemosphere.2023.139346
23. Sathish T, Maheswari SU, Balaji V, Nirupama P, Panchal H, et al. 2023. Coastal pollution analysis for environmental health and ecological safety using deep learning technique. *Adv Eng Software* 179: 103441.
24. Thanikodi S, Britto AS, Dattu VS, Al Obaid S, Alfarraj S, et al. 2023. Machining and mechanical characterization of friction stir processed (FSP) surface hybrid composites (AA8014 + TiB_2 + ZrO_2). *Int J Adv Manufac Technol* 1-8. https://doi.org/10.1007/s00170-023-12198-z
25. Adediran AA, Akinwande AA, Balogun OA, Olorunfemi BJ. 2021. Optimization studies of stir casting parameters and mechanical properties of TiO_2 reinforced Al7075 composite using response surface methodology. *Sci Rep* 11(1): 19860. https://doi.org/10.1038/s41598-021-99168-1
26. Soares E, Bouchonneau N, Alves E, Alves K, Filho OA, et al. 2022. Electric arc furnace dust recycled in 7075 aluminum alloy composites fabricated by spark plasma sintering (SPS). *Materials* 15(19): 6587. https://doi.org/10.3390/ma15196587
27. Sathish T, Kamaraj L, Mohanavel V, Jazaa Y, Qahtani F, et al. 2023. A novel technique implementation to fabricate and analysis of AZ91D with TiN through FSP. *Int J Adv Manuf Technol* 1-6. https://doi.org/10.1007/s00170-023-12024-6
28. Thanikodi S, Saragada DV, Kumar ME, Akram PS, Rathinasamy S, et al. 2023. Optimizing reinforcement quantity and synthesizing parameters of iron/fly ash/CNT nanocomposite. *Int J Adv Manuf Technol* 1-9. https://doi.org/10.1007/s00170-023-11842-y
29. Babu SV, Ushasree J, Soundararajan M, Dubey S, Sathish T, et al. 2023. Comparative analysis of load transfer efficiency in plain and continuously reinforced concrete pavements. *Mater Today Proc* 2023. https://doi.org/10.1016/j.matpr.2023.08.075
30. Timata M, Saikaew C. 2018. Influences of spindle speed and feed rate on exit burr height and workpiece diameter in drilling forging brass. *Solid State Phenomena* 279: 67-71. https://doi.org/10.4028/www.scientific.net/SSP.279.67
31. Gopalakrishnan T, Saravanan R, Malladi A, Manikandan R, Jagadeeswaran P, et al. 2023. Effects of molybdenum disulfide nano-particles' concentration on waste cooking oil nanofluid in reduction feed force in CNC wet machining of SAE 1144 steel. *Mater Today Proc* 2023. https://doi.org/10.1016/j.matpr.2023.03.442
32. Steven B. 2020. SPSS: The Ultimate Data Analysis Tool. Lulu Press, Inc.
33. Chowdary PP, Saravanan R. 2022. Novel application of SiO_2 nanofluid coolant for enhancing machinability over inconel 706 CNC end milling with conventional coolant. *Mater Today Proc* 69: 1019-1024. https://doi.org/10.1016/j.matpr.2022.08.099
34. Manikanta CD, Saravanan R. 2022. Comparison of SiO_2 nanofluid and conventional coolant for flood cooling in CNC turning of INCONEL 800 to improve surface finish and machining rate. *Mater Today Proc* 69: 1048-1054. https://doi.org/10.1016/j.matpr.2022.08.165
35. Reddy PA, Kumar DS. 2022. A novel statistical study on optimization of material removal during CNC milling AL 7075, AL7075 + B4C (15%) and AL7075 + B4C (10%) + Carbon particles (10%) based MMC's. *Mater Today Proc* 69: 1183-1186. https://doi.org/10.1016/j.matpr.2022.08.245
36. Zawawi MZ, Shaharudin MA, Manaf AR. 2014. Influences of varying combination of feed rate and depth of cut to tool wear rate and surface roughness: high speed machining technique in non-high speed milling machine. *Adv Mater Res* 903: 194-199. https://doi.org/10.4028/www.scientific.net/AMR.903.194
37. Venkataraman B, Bejaxhin AB, Saravanan R. 2022. A comparative analysis on MRR of plain epoxy composite with reinforcement of 10 wt% of pista shell particles novel composite using CNC machining. *J Pharm Negat Results* 367-375. https://doi.org/10.47750/pnr.2022.13.S04.041
38. Yahul M, Saravanan R. 2023. A comparative study on CNC contour milling performance of AA7475 with 10% fly ash reinforced novel composite with AA7475 for improving surface finish. *Mater Today Proc* 79: 159-163. https://doi.org/10.1016/j.matpr.2023.01.110
39. Yahul M, Saravanan R. 2023. An analysis on CNC machined surface roughness between AA7475 and AA7475/fly ash composite. J Phys Conf Ser 2484(1): 012026. https://doi.org/10.1088/1742-6596/2484/1/012026
40. Xu W, Wu Y, Sato T, Lin W. 2009. E15 A Method to Increase Material Removal Rate in Tangential-Feed Centerless Grinding Performed on Surface Grinder (Grinding Technology). In Proceedings of International Conference on Leading Edge Manufacturing in 21st century. The Japan Society of Mechanical Engineers, pp 559-562.
41. Karpasand F, Abbasi A, Ardestani M. 2020. Effect of amount of TiB2 and B4C particles on tribological behavior of Al7075/B4C/TiB2 mono and hybrid surface composites produced by friction stir processing. *Surf Coat Technol* 390: 125680. https://doi.org/10.1016/j.surfcoat.2020.125680